



HOLELESS HYDRAULIC ELEVATORS

Best suited for

*Low-rise buildings with less than
13 feet of rise*

Advantages

No jack hole required

*Eliminates cost of drilling and risk
of oil contamination*

Accommodates front/rear openings

Available for both low and high capacity



One Schumacher Way, Denver, IA 50622
(800) 779-LIFT (5438)
fax (319) 406-1270


Elevators@SchumacherElevator.com
www.SchumacherElevator.com

SCHUMACHER





HOLELESS HYDRAULIC ELEVATORS

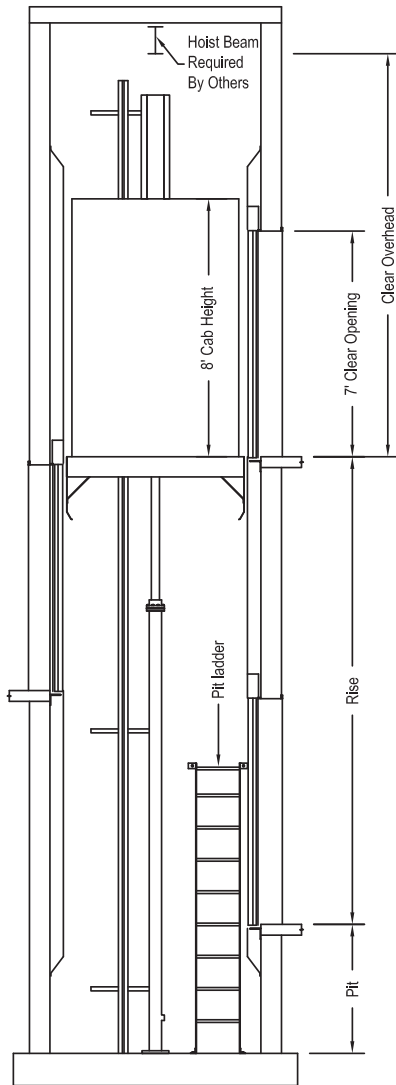

| | Capacity | Opening Type | Hoistway | | Platform | | Interior | | Door Width |
|-----------------|----------|--------------|-----------|----------|----------|----------|----------|-------|------------|
| | | | Width | Depth | Width | Depth | Width | Depth | |
| Front Opening | 2000 | SS | 7'4" | 5'9" | 6'0" | 5'1/2" | 5'8" | 4'3" | 3'0" |
| | | TS | 7'4" | 6'0" | 6'0" | 5'2" | 5'8" | 4'3" | 4'0" |
| | 2500 | SS or CP | 8'4" | 5'9" | 7'0" | 5'1/2" | 6'8" | 4'3" | 3'6" |
| | | TS | 8'4" | 6'0" | 7'0" | 5'2" | 6'8" | 4'3" | 4'6" |
| | 3000 | SS or CP | 8'4" | 6'3" | 7'0" | 5'6 1/2" | 6'8" | 4'9" | 3'6" |
| | | TS | 8'4" | 6'6" | 7'0" | 5'8" | 6'8" | 4'9" | 4'6" |
| | 3500 | SS or CP | 8'4" | 6'11" | 7'0" | 6'2 1/2" | 6'8" | 5'5" | 3'6" |
| | | TS | 8'4" | 7'2" | 7'0" | 6'4" | 6'8" | 5'5" | 4'6" |
| | 3500H | TS | 7'4" | 8'5" | 6'0" | 7'7" | 5'8" | 6'8" | 4'0" |
| | 4000 | SS or CP | 9'6" | 6'11" | 8'0" | 6'2 1/2" | 7'8" | 5'5" | 4'0" |
| TS | | 9'6" | 7'2" | 8'0" | 6'4" | 7'8" | 5'5" | 5'0" | |
| 4000H | TS | 7'7" | 9'2" | 6'0" | 8'4" | 5'8" | 7'5" | 4'0" | |
| 4500H | TS | 7'7" | 9'6 1/2" | 6'0" | 8'8 1/2" | 5'8" | 7'9 1/2" | 4'0" | |
| 5000H | TS | 7'8" | 10'2" | 6'0" | 9'4" | 5'8" | 8'5" | 4'0" | |
| Two-End Opening | 2000 | SS | 7'4" | 6'6 1/2" | 6'0" | 5'6" | 5'8" | 4'3" | 3'0" |
| | | TS | 7'4" | 7'1/2" | 6'0" | 5'9" | 5'8" | 4'3" | 4'0" |
| | 2500 | SS or CP | 8'4" | 6'6 1/2" | 7'0" | 5'6" | 6'8" | 4'3" | 3'6" |
| | | TS | 8'4" | 7'1/2" | 7'0" | 5'9" | 6'8" | 4'3" | 4'6" |
| | 3000 | SS or CP | 8'4" | 7'1/2" | 7'0" | 6'0" | 6'8" | 4'9" | 3'6" |
| | | TS | 8'4" | 7'6 1/2" | 7'0" | 6'3" | 6'8" | 4'9" | 4'6" |
| | 3500 | SS or CP | 8'4" | 7'8 1/2" | 7'0" | 6'8" | 6'8" | 5'5" | 3'6" |
| | | TS | 8'4" | 8'2 1/2" | 7'0" | 6'11" | 6'8" | 5'5" | 4'6" |
| | 3500H | TS | 7'4" | 9'5 1/2" | 6'0" | 8'2" | 5'8" | 6'8" | 4'0" |
| | 4000 | SS or CP | 9'6" | 7'8 1/2" | 8'0" | 6'8" | 7'8" | 5'5" | 4'0" |
| TS | | 9'6" | 8'2 1/2" | 8'0" | 6'11" | 7'8" | 5'5" | 5'0" | |
| 4000H | TS | 7'7" | 10'2 1/2" | 6'0" | 8'11" | 5'8" | 7'5" | 4'0" | |
| 4500H | TS | 7'7" | 10'7" | 6'0" | 9'3 1/2" | 5'8" | 7'9 1/2" | 4'0" | |
| 5000H | TS | 7'8" | 11'2 1/2" | 6'0" | 9'11" | 5'8" | 8'5" | 4'0" | |

Custom Applications Available

| Minimum Pit Depth | Minimum Overhead | Cab Height |
|-------------------|------------------|------------|
| 4'0" | 12'6" | 8'0" |

| SS = Single Slide | CP = Center Parting | TS = Two Speed |
|----------------------|------------------------|-------------------|
|----------------------|------------------------|-------------------|

BUILT TO LAST

Schumacher Elevator Company manufactures complete elevator systems and components, including passenger, freight, LULA, residential, and special purpose personnel elevators.

(800) 779-LIFT (5438)

The standard speed is 100 fpm, but holeless hydraulic elevators are available with speeds up to 200 fpm.

This elevator system utilizes a two-cylinder single-stage application mounted on the sides of the elevator.

All Schumacher holeless hydraulic elevators meet or exceed all requirements set by the American Society of Mechanical Engineers (ASME A17.1).

Dimensions are subject to change without notice.



LEED Compliant

SEC-0716