

# Holeless Hydraulic Elevators



## **Best suited for**

*Low-rise buildings*

## **Advantages**

*No jack hole required*

*Eliminates cost of drilling and risk  
of oil contamination*

*Accommodates front/rear openings*


*Available for both low and high capacity*

One Schumacher Way, Denver, IA 50622  
(800) 779-LIFT (5438)  
fax (319) 406-1270

[Elevators@SchumacherElevator.com](mailto:Elevators@SchumacherElevator.com)  
[www.SchumacherElevator.com](http://www.SchumacherElevator.com)



# Holeless Hydraulic Elevators

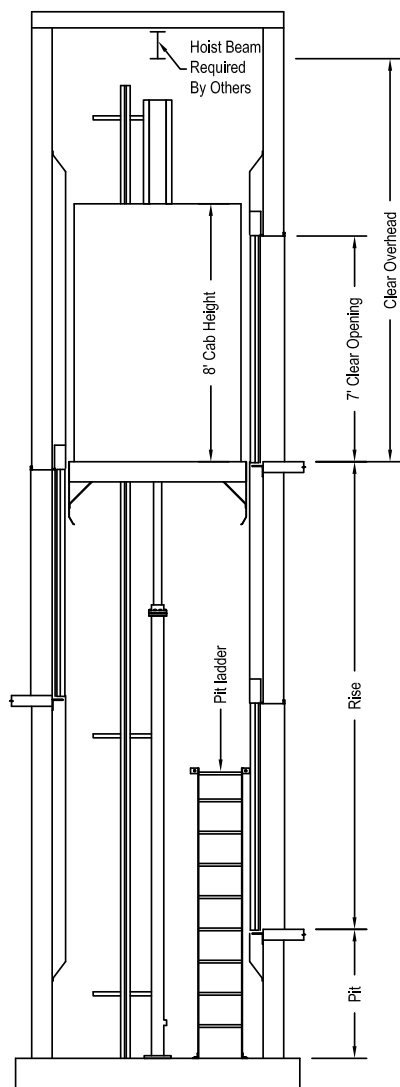

## BUILT TO LAST

Schumacher Elevator Company manufactures complete elevator systems and components, including passenger, freight, LULA, residential, and special purpose personnel elevators.

**(800) 779-LIFT (5438)**

	Capacity	Opening Type	Hoistway		Platform		Interior		Door
			Width	Depth	Width	Depth	Width	Depth	Width
Front Opening	2000	SS	7'4"	5'9"	6'0"	5'1½"	5'8"	4'3"	3'0"
		TS	7'4"	6'0"	6'0"	5'2"	5'8"	4'3"	4'0"
	2500	SS or CP	8'4"	5'9"	7'0"	5'1½"	6'8"	4'3"	3'6"
		TS	8'4"	6'0"	7'0"	5'2"	6'8"	4'3"	4'6"
	3000	SS or CP	8'4"	6'3"	7'0"	5'6½"	6'8"	4'9"	3'6"
		TS	8'4"	6'6"	7'0"	5'8"	6'8"	4'9"	4'6"
	3500	SS or CP	8'4"	6'11"	7'0"	6'2½"	6'8"	5'5"	3'6"
		TS	8'4"	7'2"	7'0"	6'4"	6'8"	5'5"	4'6"
	3500H	TS	7'4"	8'5"	6'0"	7'7"	5'8"	6'8"	4'0"
	4000	SS or CP	9'6"	6'11"	8'0"	6'2½"	7'8"	5'5"	4'0"
		TS	9'6"	7'2"	8'0"	6'4"	7'8"	5'5"	5'0"
4000H	TS	7'7"	9'2"	6'0"	8'4"	5'8"	7'5"	4'0"	
4500H	TS	7'7"	9'6½"	6'0"	8'8½"	5'8"	7'9½"	4'0"	
5000H	TS	7'8"	10'2"	6'0"	9'4"	5'8"	8'5"	4'0"	
Two-End Opening	2000	SS	7'4"	6'6½"	6'0"	5'6"	5'8"	4'3"	3'0"
		TS	7'4"	7'1½"	6'0"	5'9"	5'8"	4'3"	4'0"
	2500	SS or CP	8'4"	6'6½"	7'0"	5'6"	6'8"	4'3"	3'6"
		TS	8'4"	7'1½"	7'0"	5'9"	6'8"	4'3"	4'6"
	3000	SS or CP	8'4"	7'1½"	7'0"	6'0"	6'8"	4'9"	3'6"
		TS	8'4"	7'6½"	7'0"	6'3"	6'8"	4'9"	4'6"
	3500	SS or CP	8'4"	7'8½"	7'0"	6'8"	6'8"	5'5"	3'6"
		TS	8'4"	8'2½"	7'0"	6'11"	6'8"	5'5"	4'6"
	3500H	TS	7'4"	9'5½"	6'0"	8'2"	5'8"	6'8"	4'0"
	4000	SS or CP	9'6"	7'8½"	8'0"	6'8"	7'8"	5'5"	4'0"
		TS	9'6"	8'2½"	8'0"	6'11"	7'8"	5'5"	5'0"
	4000H	TS	7'7"	10'2½"	6'0"	8'11"	5'8"	7'5"	4'0"
	4500H	TS	7'7"	10'7"	6'0"	9'3½"	5'8"	7'9½"	4'0"
5000H	TS	7'8"	11'2½"	6'0"	9'11"	5'8"	8'5"	4'0"	
Higher Capacities & Custom Applications Available									

Minimum Pit Depth	Minimum Overhead	Cab Height
4'0"	12'6"	8'0"

SS = Single Slide	CP = Center Parting	TS = Two Speed
----------------------	------------------------	-------------------

This elevator system utilizes a two-cylinder single-stage application mounted on the sides of the elevator.

All Schumacher holeless hydraulic elevators meet or exceed all requirements set by the American Society of Mechanical Engineers (ASME A17.1).

Dimensions are subject to change without notice.

